



Powered By:
NICHIA

G826-LED

Large Low Profile Gladiator Luminaire

Job Information Digitize your light.™

Type: _____

Catalog #: _____

Project: _____

Comments: _____

Prepared by: _____




LED Lighting

Description

Style combined with elegance. The Large Gladiator luminaire provides an aesthetically pleasing addition to any roadway or parking lot. With its smooth, defined curves and highly functional optics that provide maximum lumen output while ensuring beam uniformity. The combination of form and function blend together to make Gladiator the premier outdoor lighting fixture.

G826-LED

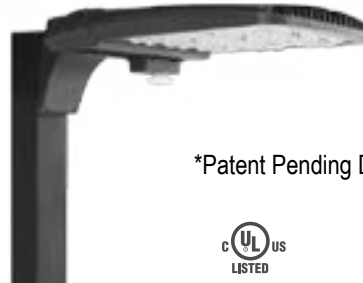


*Patent Pending Design



Features

- Die cast aluminum housing and front frame, integral heat sinking and driver compartment.
- Powder coat finish over a chromatic conversion coating.
- Photocell adaptable.
- Mounts with two-piece bracket, yoke, adjustable slipfitter, heavy duty adjustable knuckle with 1/2" NPS threads, Pole Mounting arm or 2-3/8" diameter mounting arm adapter.
- Weight: 30lbs.
- EPA: 1.1ft².

Dimensions

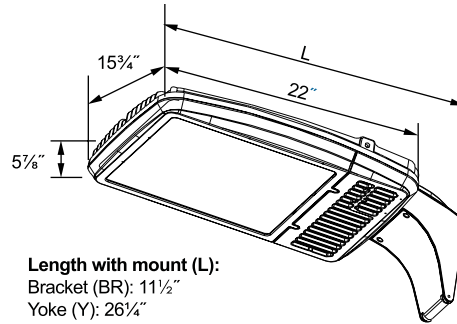

Length with mount (L):
 Bracket (BR): 11 1/2"
 Yoke (Y): 26 1/4"
 Slipfitter (SF): 29 1/4"
 Mounting Arm Adaptor: 26 1/8"

Ordering Information:

Example: (D826-LED-120-30-UNV-LP-T5-YM-BZ-WDF)

G826-LED

Series	Wattage/Lumen	Color Temp.	Voltage	Body	Optics	Mounting	Finish	Option
Large Gladiator Area Luminaire	120	120W/15360 ^{3,5,7}	30 3000K	UNV 120-277V	T2 Type 2	PM Pole Mount	BZ Bronze ¹	SM Smart Dim
	140	140W/17920 ^{3,5,7}	35 3500K		T3 Type 3	WB Wall Bracket	BL Black	PC Photocell
	160	160W/20480 ^{3,5,7}	40 4000K	347 347V	T4A Type 4A	RPM Round Pole Mount	WH White	WSF Wired Single Fuse
	180	180W/23040 ^{3,5,7}	50 5000K ^{4,5}	480 480V	T5 Type 5	Heavy Duty	SL Silver	WDF Wired Double Fuse
	200	200W/25600 ^{3,5,7}		(Step-Down Transformer used for 480V Divider)		LYM Large Yoke Mount	CU Custom ²	MS Motion Sensor (with Dimming) ⁶
	240	240W/30720 ^{3,5,7}			30 30° Flood	YM Yoke Mount		SP Surge Protection
	260	260W/33280 ^{3,5,7}			55 55° Flood	SF Slip Fitter		BI Bi-Level motion sensing
	280	280W/35840 ^{3,7}			90 90° Flood	PMA Pole Mounting Arm Adapter 2-3/8		95 95 CRI
	300	300W/38400 ^{3,7}						

¹Standard for fixture
²Contact factory for custom finish
³Initial Delivered Lumens
⁴Standard Color Temp.
⁵DLC Listed
⁶20ft mounting height lens standard. Contact factory for higher mounting.
⁷Smart Dim Available

Digitize your light.™

©2015 GNP Energy , www.gnpenergy.com T: (312) 970-1LED
 F: (866) 286-1588 Note : Specifications subject to change without notice.

LIGHTING



Powered By:
NICHIA

G826-LED Large Low Profile Gladiator Luminaire


Job Information Digitize your light.™

Type:	
Catalog #:	
Project:	
Comments:	
Prepared by:	




LED Lighting

Photometric Data

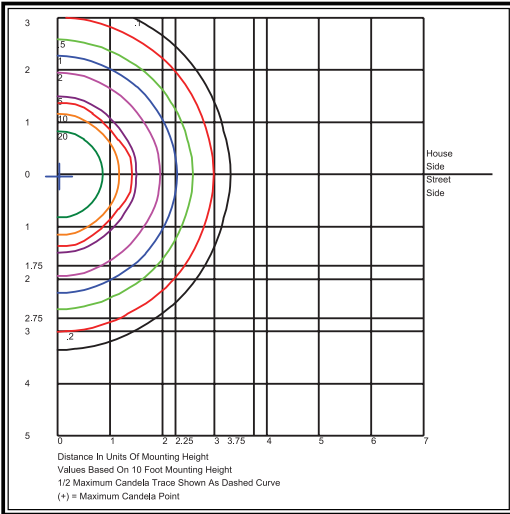

160W

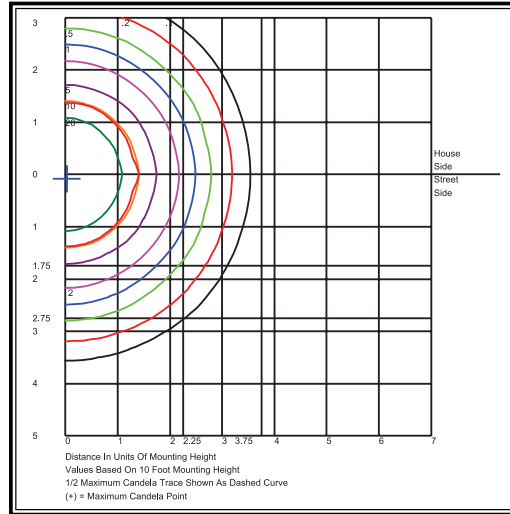

260W

Performance Data

CRI:	72
CCT:	3000K, 3500K, 4000K, 5000K
Warranty:	10 yr. Limited Warranty
Dimming:	Available with 0-10V inputs dimming down to 10%
Operating Temperature:	0°-50°C Max Ambient
L70 Rating:	100,000+ Hours
IP Rating:	IP66
Drive Current:	700mA
Vibration:	3G Vibration Rated

Delivered Light Output and Equivalency Chart

HID to LED Replacement		
Initial Lumens Delivered	LED	HID Replacement
15240 lm	120W	400W
25400 lm	200W	750W
30480 lm	240W	1000W

*for mounting heights over 25ft consult factory.

Digitize your light.™

©2015 GNP Energy, www.gnpenergy.com T: (312) 970-1LED
F: (866) 286-1588 Note : Specifications subject to change without notice.

LIGHTING



Powered By: **NICHIA**

G826-LED Large Low Profile Gladiator Luminaire

Digitize your light.™

Job Information

Type:	
Catalog #:	
Project:	
Comments:	
Prepared by:	



LED Lighting

Mounting Options



Yoke Mount



Slip Fitter



Pole Mount



Round Pole Mount Adapter



Large Yoke Mount



Wall Bracket



Pole Mount Arm Adapter 2-3/8"



LIGHTING



Digitize your light.™

©2015 GNP Energy, www.gnpenergy.com T: (312) 970-1LED
F: (866) 286-1588 Note : Specifications subject to change without notice.